


Omnidirectional Back Electret Condenser microphone Cartridge

JLI-61A

- ✓ *Small Microphones for general use*
- ✓ *Back Electret type designed for high resistance to vibrations, high signal-to-noise ratio*
- ✓ *High sensitivity type*



■ *Typical Frequency Response Curve*

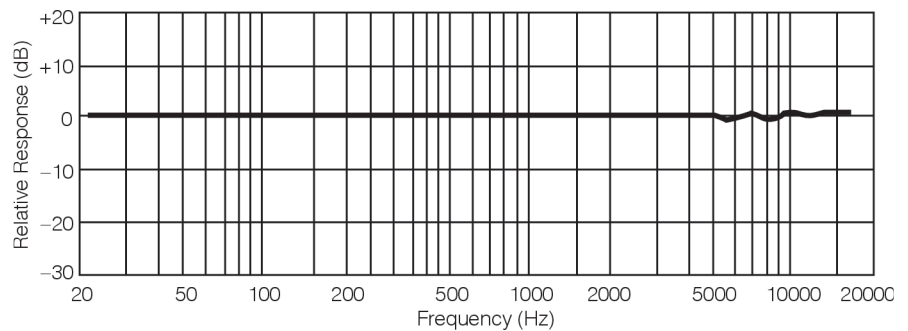


■ *Sensitivity*

$V_s = 2.0V$
 $R_L = 2.2k\Omega$

$-35 \pm 4dB$

■ *Dimensional Drawing* Unit: mm

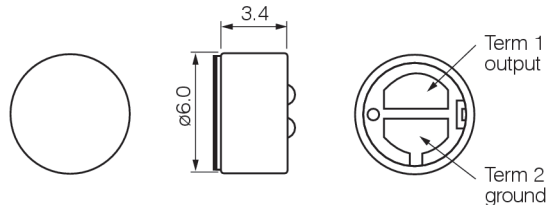

SPECIFICATIONS

Sensitivity	-35±4dB (0dB=1V/pa ,1kHz)
Impedance	Less than 2.2kΩ
Directivity	Omnidirectional
Frequency	20-20,000 Hz
Max. operation voltage	10V
Standard operation voltage	2V
Current consumption	Max. 0.5 mA
Sensitivity reduction	Within -3dB @ 1.5V
S/N Ratio	More than 62dB

JLI Electronics Inc.

P.O. Box 7
Harleysville, PA 19438-0007 US
Phone: 215-256-3200
Fax: 215-256-1647
E-mail: info@jlielectronics.com
www.jlielectronics.com