
## Omnidirectional Back Electret Condenser Microphone CartridgeJLI-62AJLI-62CCJLI-62CJLI-62K

Very small, omnidirectional microphone

✓ Most suited to products having limited space

- JLI-62CC (33pF) GSM, PDC, etc.
- JLI-62K (10pF) DECT, PHS, PCN, PCS, etc.
- ✓ Back electret type design for high resistance to vibrations JLI-62A/62C without capacitator
- ✓ Microphone with pins for flexible PCB (JLI-62B type)
- ✓ Better-shielded type (JLI-62B, C, CC, K)

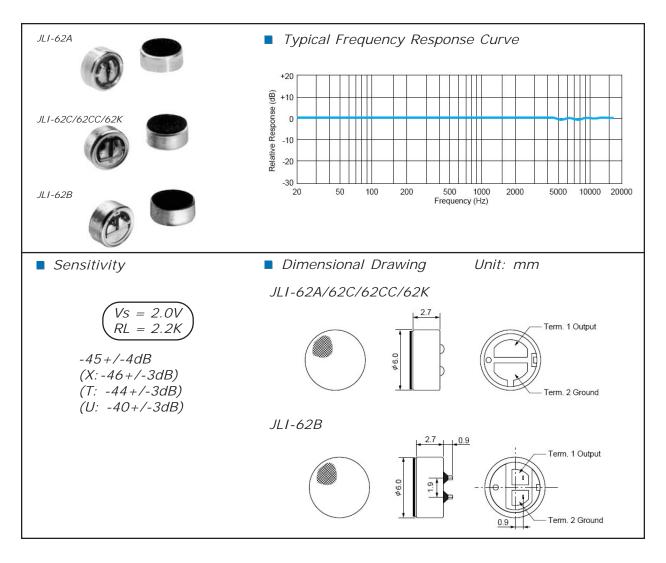

SPECIFICATIONS		
Sensitivity Impedance Directivity Frequency Max. operation voltage Standard operation voltage Current consumption Sensitivity reduction Signal to noise ratio	-45 +/- 4dB (0dB=1V/Pa, 1kHz) Less than 2.2k Omnidirectional 20Hz ~ 16kHz 10V 2.0V Max. 0.5mA Within -3dB @ 1.5V More than 58dB	



P.O. Box 7 Harleysville, PA 19438-0007 US Phone: 215-256-3200 Fax: 215-256-1647 E-mail: info@jlielectronics.com www.jlielectronics.com