

## Here are the connections for the MS Tabitha microphone.


The center terminal of the front or “Mid” capsule goes to “SGNL\_A”.  
Ground of the front or “Mid” capsule goes to “Gnd\_A”

The center terminal of the left facing “Side” capsule goes to “SGNL\_B”.

The center terminal of right “Side” capsule goes to “Gnd\_B”

XLR Pin 1, to XLR1, XLR Pin 2 and 3 to XLR2a, XLR3a, and XLR Pin 4 and 5 to XLR2b, XLR3b, on the PCB.

Connect four 22nF capacitors between Pins 2, 3, 4, and 5 of the XLR and Ground. This should be as close the XLR jack as possible for best EMI/RF suppression. Connect Pin 1 to Ground Lug.

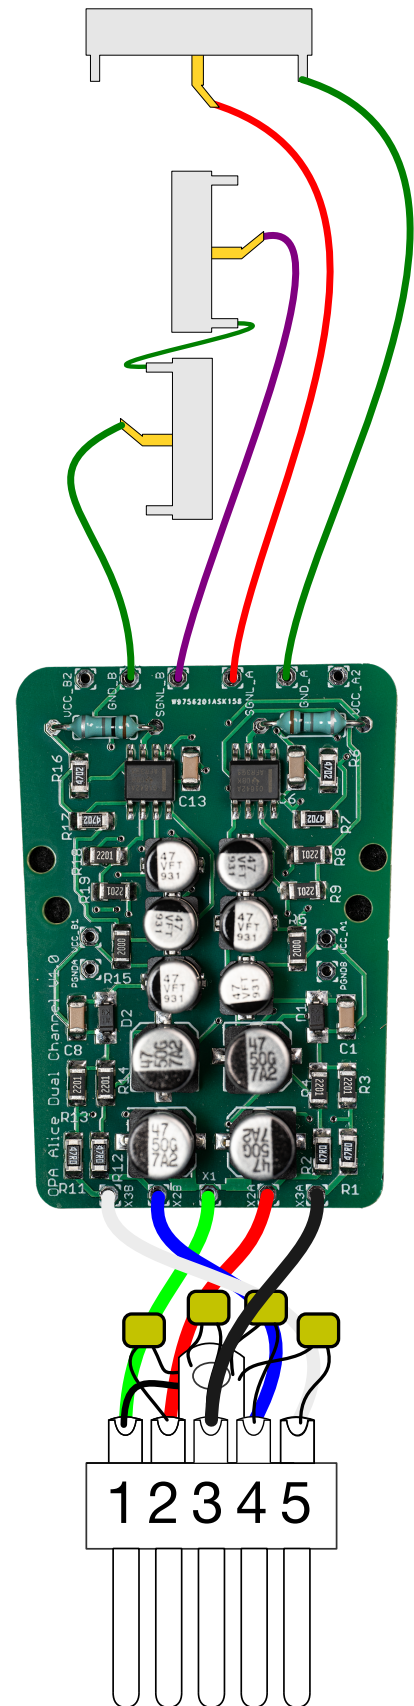

**NOTE: Pay attention to XLR Pin Numbers. They are printed on most connectors. Look Closely**