


# Noise Cancelling Back Electret Condenser microphone Cartridge

## JLI-66D103/67D103

- ✓ *Ultra small, thin type.*
- ✓ *Close talk characteristics effectively reduce ambient noise.*

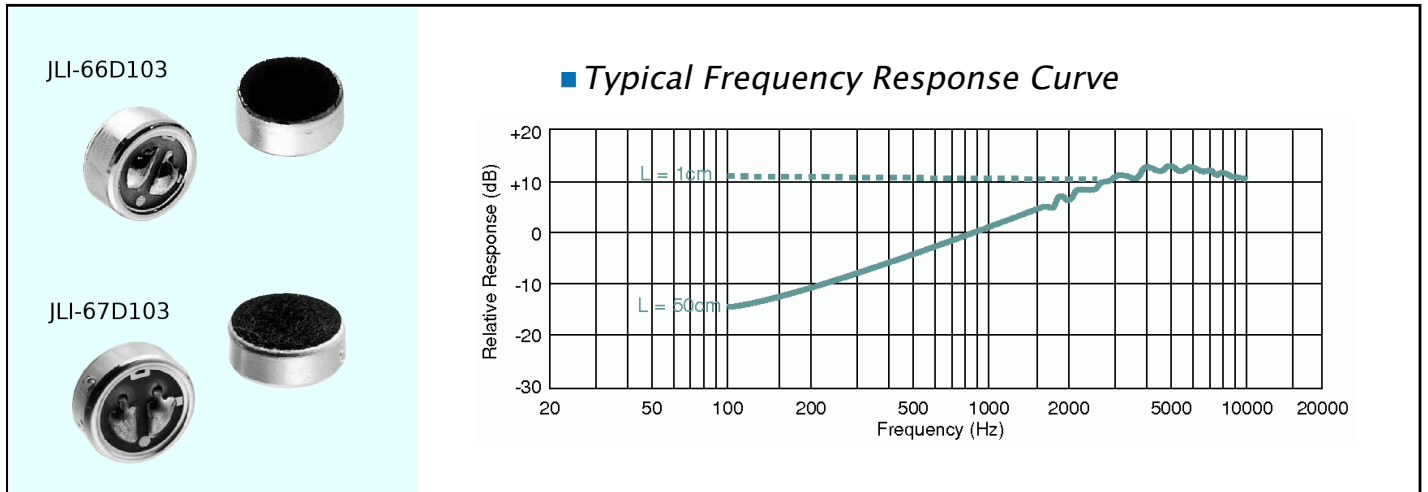


■ **Sensitivity**

$V_s = 2.0V$   
 $R_L = 2.2k\Omega$


$-51 \pm 4.5dB$   
(@  $L = 50cm$ )

■ **Dimensional Drawing Unit: mm**

JLI-66D103

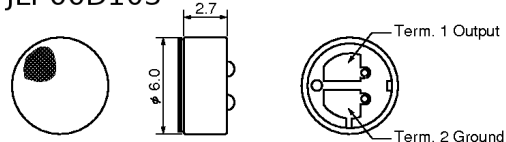

JLI-67D103

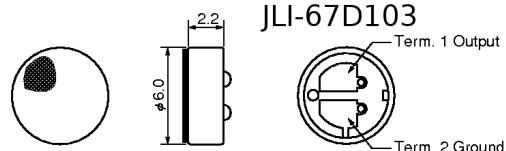

### SPECIFICATIONS

Sensitivity	-51±4.5dB (0dB=1V/pa ,1kHz)
Impedance	Less than 2.2kΩ
Directivity	Noise Cancelling
Frequency	100- 10,000 Hz
Max. operation voltage	10V
Standard operation voltage	2V
Current consumption	Max. 0.5 mA
Sensitivity reduction	Within -3dB @ 1.5V
S/N Ratio	More than 50dB

**JLI** Electronics Inc.

P.O. Box 7  
Harleysville, PA 19438-0007 US  
Phone: 215-256-3200  
Fax: 215-256-1647  
E-mail: [info@jlielectronics.com](mailto:info@jlielectronics.com)  
[www.jlielectronics.com](http://www.jlielectronics.com)