


# Noise Cancelling Back Electret Condenser Microphone Cartridge

## JLI-55D103

✓ Close talk characteristics effectively reduce ambient noise.

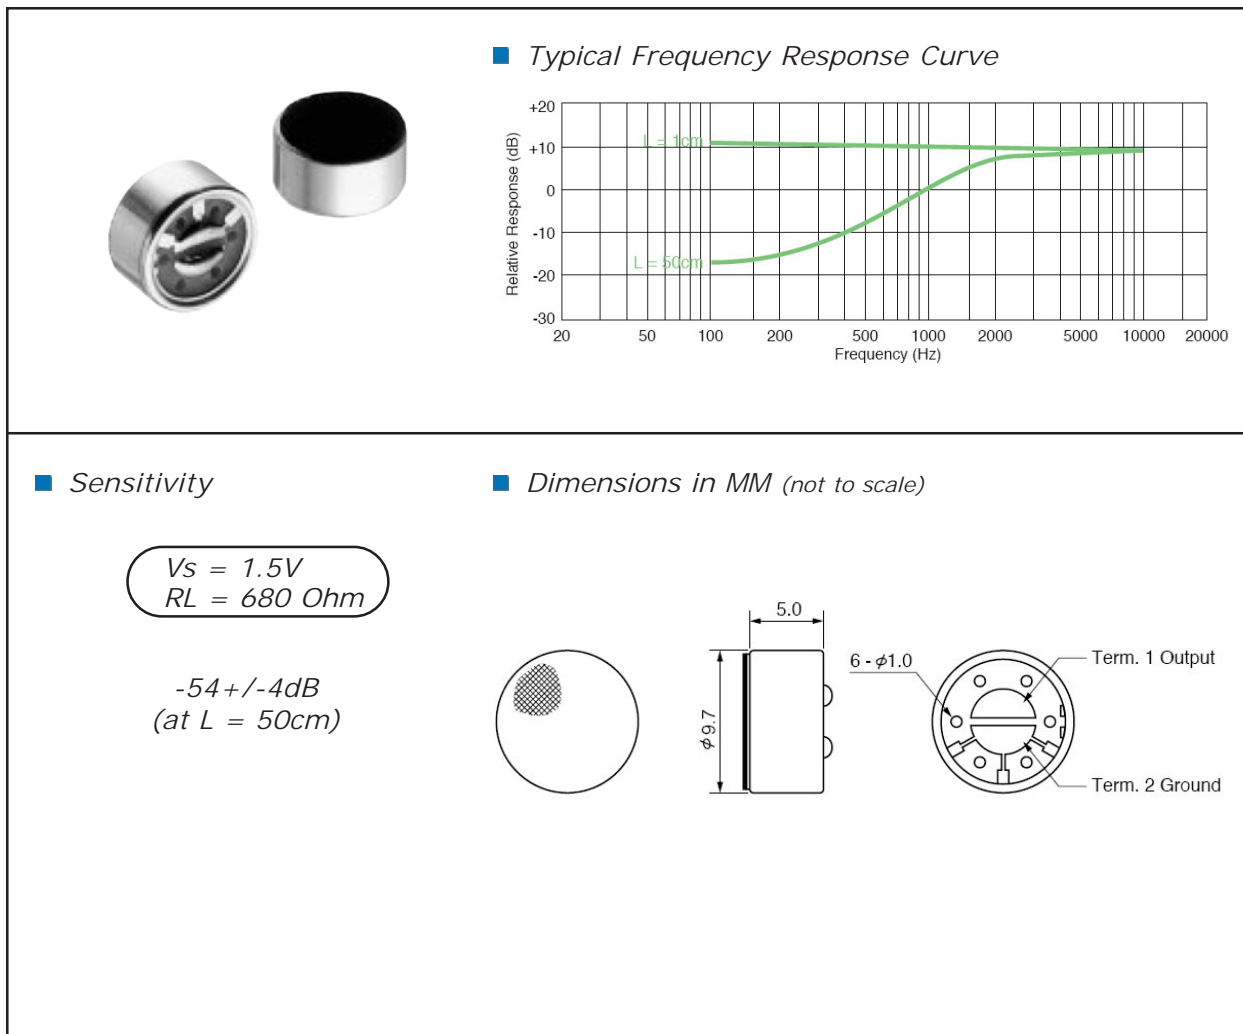

### SPECIFICATIONS

Sensitivity	-54 +/- 4dB (at L=50cm) (0dB=1V/Pa, 1kHz)
Impedance	Less than 680 Ohm
Directivity	Noise Cancelling
Frequency	100Hz ~ 10kHz
Max. operation voltage	10V
Standard operation voltage	1.5V
Current consumption	Max. 0.5mA
Sensitivity reduction	Within -3dB @ 1V
Signal to noise ratio	More than 58dB

**JLI** Electronics Inc.

P.O. Box 7  
 Harleysville, PA 19438-0007 US  
 Phone: 215-256-3200  
 Fax: 215-256-1647  
 E-mail: [info@jlielectronics.com](mailto:info@jlielectronics.com)  
[www.jlielectronics.com](http://www.jlielectronics.com)